

Chapter 6


Capacity and LOS of Multi-Lane Highways Sections

AN-NAJAH NATIONAL UNIVERSITY
NABLUS, PALESTINE

Multilane Highways


- Multilane highways may exhibit some of the following characteristics:
 - Posted speed limits are usually between 60 and 100 km/h
 - They may be undivided or include medians
 - They are located in suburban areas or in high-volume rural corridors
 - They may include a two-way, left-turn median lane (TWLTL)
 - Traffic volumes range from 15,000 to 40,000/day
 - Volumes are up to 100,000/day with grade separations and no cross-median access
 - Traffic signals at major crossing points are possible
 - There is partial control of access

Multilane Highways

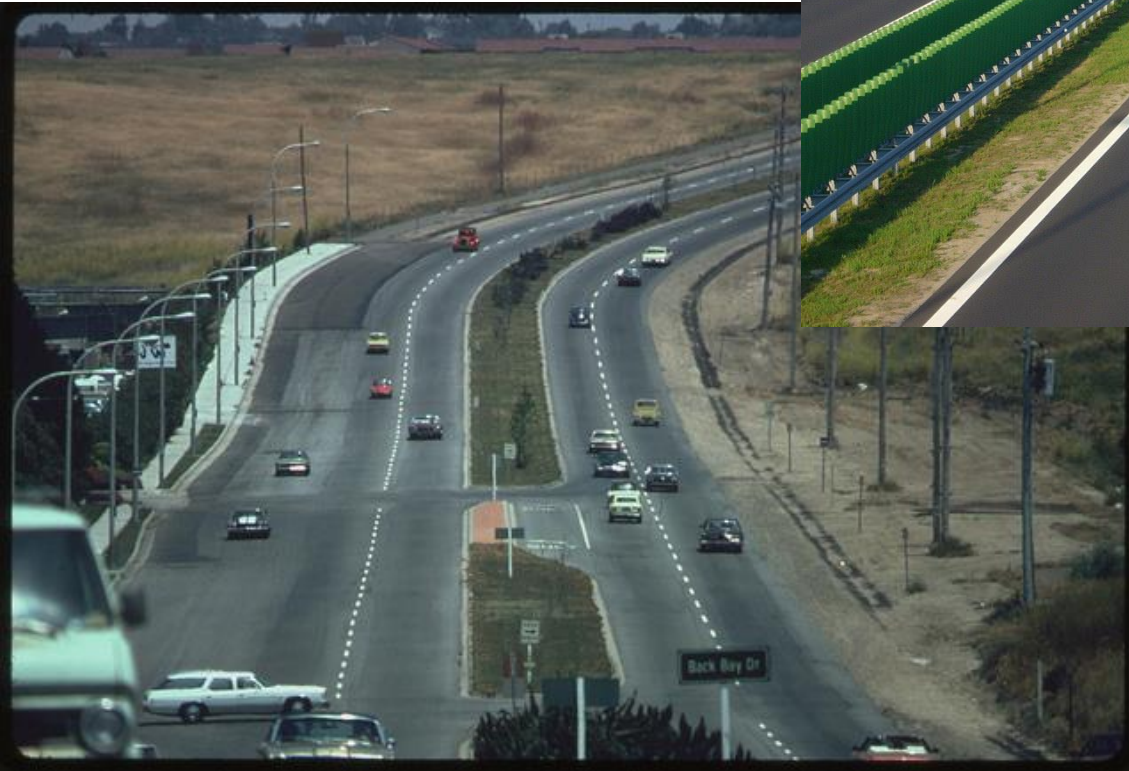



Road Diet project in Honolulu, Hawaii.

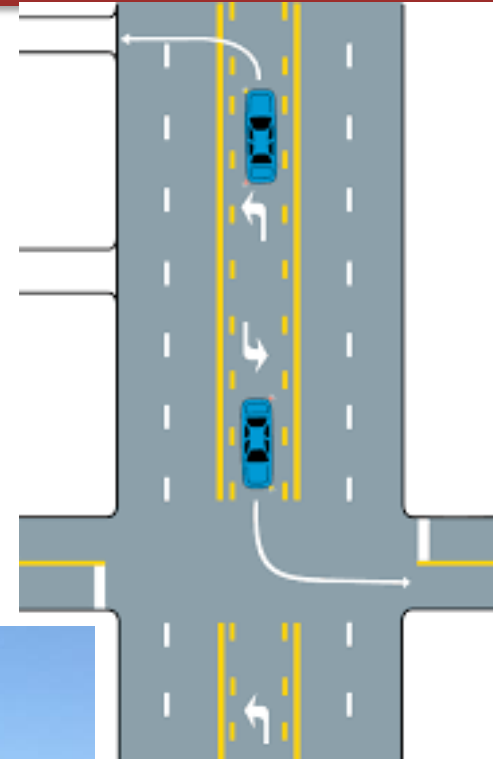

Typical Capacity Values

Table 13.1: Capacity Under Ideal Conditions for Uninterrupted Flow Facilities

Type of Facility	Free-Flow Speed (mi/h)	Capacity
Freeways	≥70	2,400 pc/h/ln
	65	2,350 pc/h/ln
	60	2,300 pc/h/ln
	55	2,250 pc/h/ln
Multilane Highways	≥60	2,200 pc/h/ln
	55	2,100 pc/h/ln
	50	2,000 pc/h/ln
	50	1,900 pc/h/ln
Two-Lane Highways	All	3,200 pc/h (total, both dir) 1,700 pc/h (max. one dir)

Multilane Highways

- Any two of the following three performance characteristics can describe the level of service (LOS) for a multilane highway:

V_p : Flow rate (pc/h/ln)

S : Average passenger car speed (mi/h)

D : Density defined as number of cars per mi (pc/mi/ln)

$$D = \frac{V_p}{S}$$

Although **density** is the primary parameter in defining the LOS for Multilane highways

Multilane Highways

- Following figure illustrates the level-of-service regimes Constant up to 1400 pc/hr/ln

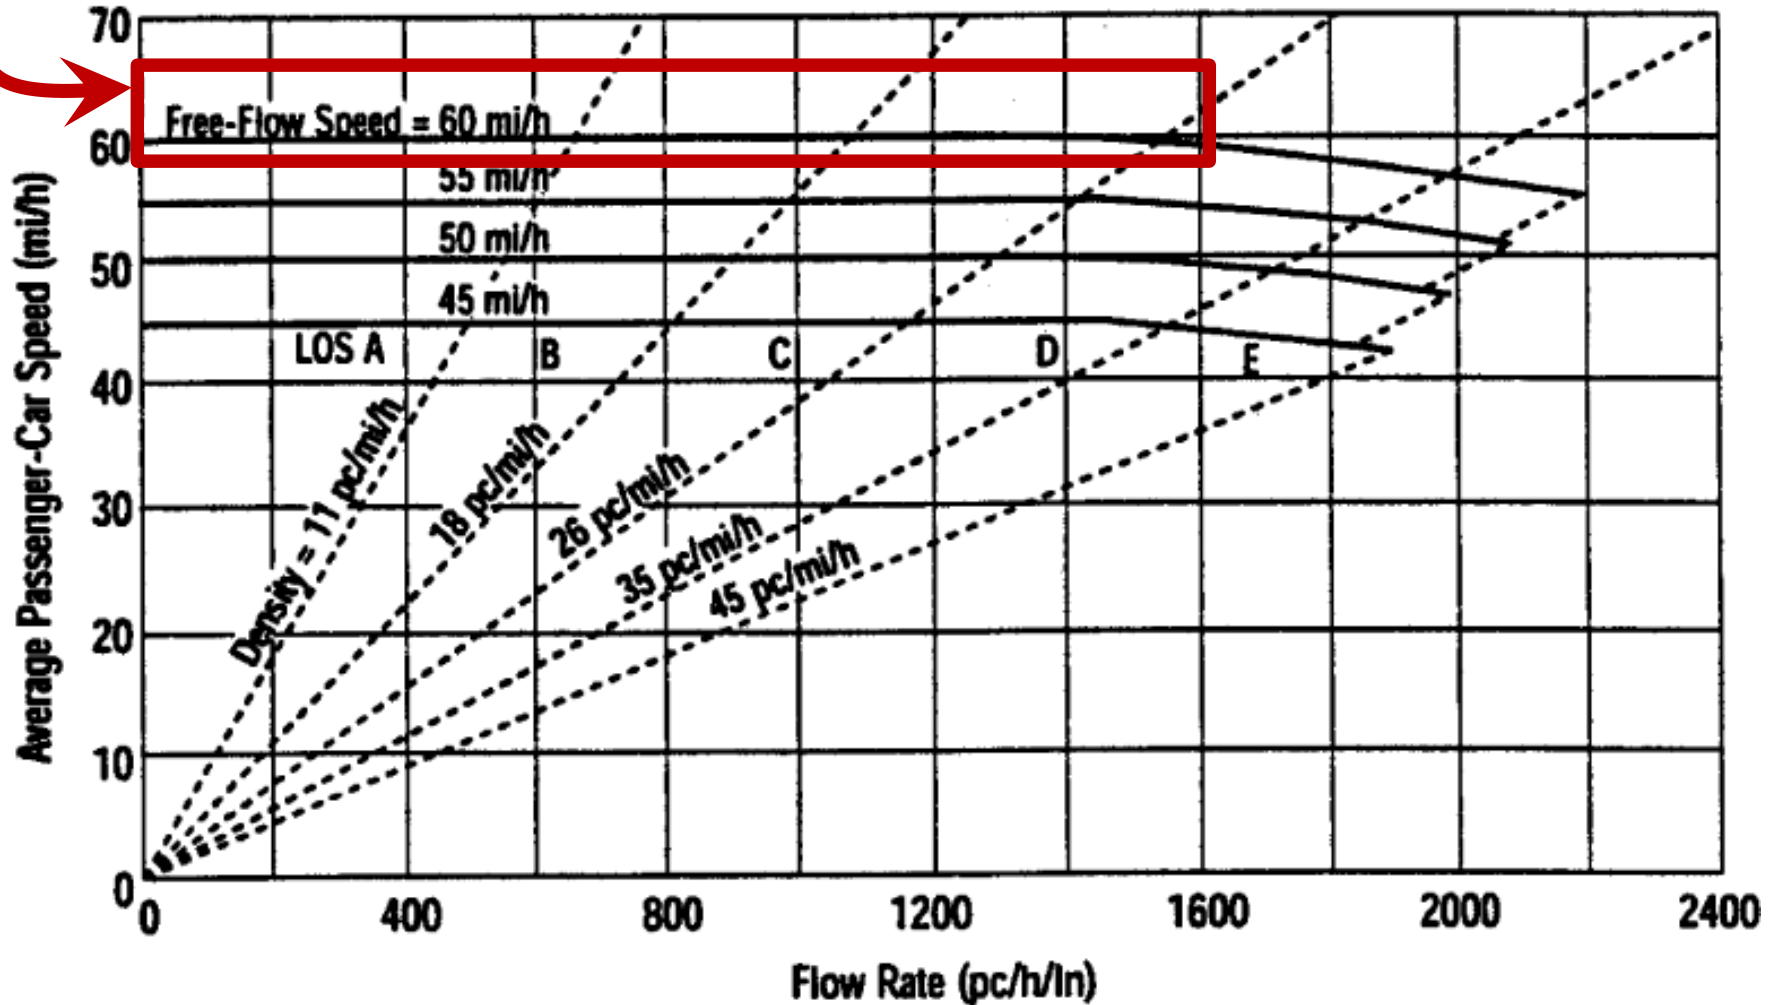


Figure 9.15 Speed-Flow Curves with Level-of-Service Criteria for Multilane Highways

Multilane Highways

Table 9.33


LOS Criteria of
Multilane
Highways

Table 9.33 Level-of-Service Criteria for Multilane Highways

Free-Flow Speed	Criteria	LOS				
		A	B	C	D	E
60 mi/h	Maximum density (pc/mi/ln)	11	18	26	35	40
	Average speed (mi/h)	60.0	60.0	59.4	56.7	55.0
	Maximum volume- to-capacity ratio (v/c)	0.30	0.49	0.70	0.90	1.00
	Maximum service flow rate (pc/h/ln)	660	1080	1550	1980	2200
55 mi/h	Maximum density (pc/mi/ln)	11	18	26	35	41
	Average speed (mi/h)	55.0	55.0	54.9	52.9	51.2
	Maximum v/c	0.29	0.47	0.68	0.88	1.00
	Maximum service flow rate (pc/h/ln)	600	990	1430	1850	2100
50 mi/h	Maximum density (pc/mi/ln)	11	18	26	35	43
	Average speed (mi/h)	50.0	50.0	50.0	48.9	47.5
	Maximum v/c	0.28	0.45	0.65	0.86	1.00
	Maximum service flow rate (pc/h/ln)	550	900	1300	1710	2000
45 mi/h	Maximum density (pc/mi/ln)	11	18	26	35	45
	Average speed (mi/h)	45.0	45.0	45.0	44.4	42.2
	Maximum v/c	0.26	0.43	0.62	0.82	1.00
	Maximum service flow rate (pc/h/ln)	480	810	1170	1550	1900

Service Flow Rates and Service Volumes

- A **Service Flow (SF) Rate** is defined as the maximum rate of flow that can be reasonably expected on a lane or roadway under prevailing roadway, traffic, and control conditions **while maintaining a particular level of service (LOS)**.
- Each LOS covers a range of values
- The **SF rate** is defined as the max. flow rate that can be sustained without exceeding the max. density defined for the LOS. There are only 5 SF rates, not 6.
- **LOS F** represents unstable flow; exceeds capacity (**mostly LOS E**).

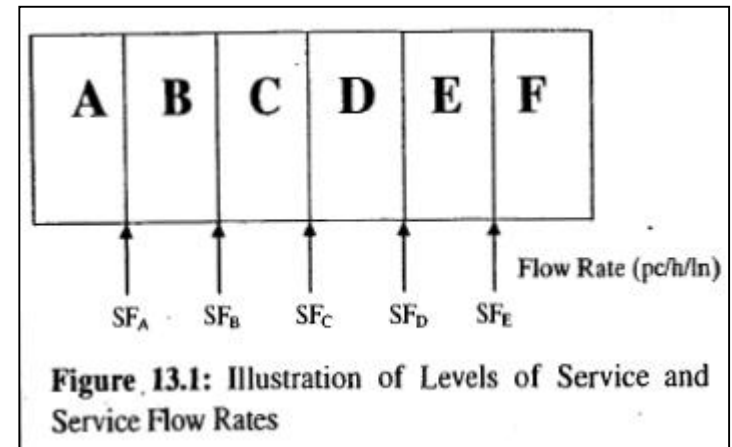

Multilane Highways

Calculating the Flow Rate for a Multilane Highway

- The flow rate in pc/h/ln for a multilane highway is computed as:

$$v_p = \frac{V}{(PHF)(N)(f_p)(f_{HV})}$$

v_p = 15-minute passenger-car equivalent flow rate (pc/h/ln)

V = hourly peak vehicle volume (veh/h) in one direction

N = number of travel lanes in one direction (2 or 3)

f_p = driver population factor with a range of 0.85 to 1.00. Use 1.00 for commuter traffic.

If there is significant recreational or weekend traffic, the value is reduced

Multilane Highways

Calculating the Flow Rate for a Multilane Highway

f_{HV} = heavy-vehicle adjustment factor (Eq. 9.4)

$$f_{HV} = \frac{1}{1 + P_T(E_T - 1) + P_R(E_R - 1)}$$

P_T and P_R = decimal portion of trucks/buses and recreational vehicles in the traffic stream

E_T and E_R = passenger car equivalents. Number of cars using the same space as a truck/bus or a recreational vehicle

Multilane Highways

Calculating the Flow Rate for a Multilane Highway

- To estimate E_T and E_R There are two situations that must be considered:

1. Extended general segments

Use **Table 9.25**

2. Specific grades

- Upgrades: **Tables 9.26 and 9.27**
- Downgrades: E_T from **Table 9.28** while E_R are treated as if they were on level terrain

PCEs for trucks & buses can be determined for three grade conditions:

- 1) extended general segments
 - These occur when a single grade is not too long or steep to have significant impact on capacity.
 - When grades $\geq 3\%$ and $< \frac{1}{4}$ mi, or grades $< 3\%$ and $< \frac{1}{2}$ mi
- 2) specific upgrades
 - Any segment's grade $\geq 3\%$ and $> \frac{1}{4}$ mi, or a grade $< 3\%$ and $> \frac{1}{2}$ mi, should be considered as a separate segment.
- 3) specific downgrades.

- **Composite grades:** When a segment of multi-lane highway consists of two or more consecutive upgrades with different slopes, the PCE of heavy vehicles is determined by using :
 1. **The average grade:** by dividing the total rise in elevation by the total horizontal distance. The average grade technique is valid for conditions where **grades are $< 3\%$** or the **total length of the composite grade is < 4000 ft.**


Sample for Average Grade

- The average grade is:

$$(3.5 \times 2000 + 5 \times 3000) / 5000 = 4.4\%$$

$$\text{Or, Total Rise} = 0.035 \times 2000 + 0.05 \times 3000 = 320 \text{ ft}$$

$$\text{Average Grade} = 320 / 5000 = 4.4\%$$

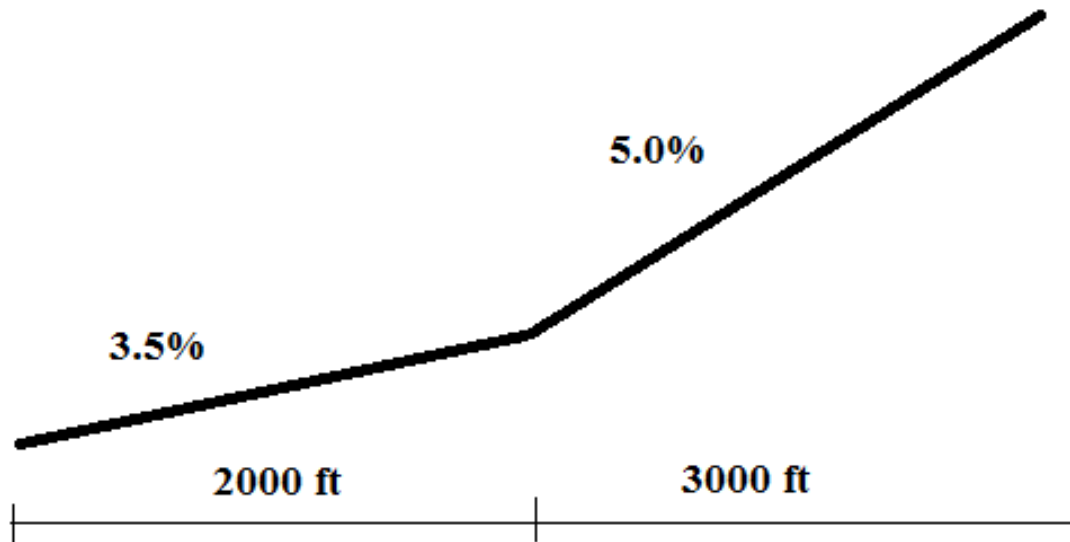

Multilane Highways

Table 9.25 Passenger-Car Equivalents for Trucks and Buses (E_T) and RVs (E_R) on General Highway Segments: Multilane Highways and Basic Freeway Sections

<i>Factor</i>	<i>Type of Terrain</i>		
	<i>Level</i>	<i>Rolling</i>	<i>Mountainous</i>
E_T (trucks and buses)	1.5	2.5	4.5
E_R (RVs)	1.2	2.0	4.0

Multilane Highways

Table 9.26 Passenger-Car Equivalents for Trucks and Buses (E_T) on Upgrades, Multilane Highways, and Basic Freeway Sections

Upgrade (%)	Length (mi)	E_T								
		Percentage of Trucks and Buses								
		2	4	5	6	8	10	15	20	25
< 2	All	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
≥ 2–3	> 0.00–0.25	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	> 0.25–0.50	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	> 0.50–0.75	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	> 0.75–1.00	2.0	2.0	2.0	2.0	1.5	1.5	1.5	1.5	1.5
	> 1.00–1.50	2.5	2.5	2.5	2.5	2.0	2.0	2.0	2.0	2.0
	> 1.50	3.0	3.0	2.5	2.5	2.0	2.0	2.0	2.0	2.0
> 3–4	> 0.00–0.25	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	> 0.25–0.50	2.0	2.0	2.0	2.0	2.0	2.0	1.5	1.5	1.5
	> 0.50–0.75	2.5	2.5	2.0	2.0	2.0	2.0	2.0	2.0	2.0
	> 0.75–1.00	3.0	3.0	2.5	2.5	2.5	2.5	2.0	2.0	2.0
	> 1.00–1.50	3.5	3.5	3.0	3.0	3.0	3.0	2.5	2.5	2.5
	> 1.50	4.0	3.5	3.0	3.0	3.0	3.0	2.5	2.5	2.5
> 4–5	> 0.00–0.25	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	> 0.25–0.50	3.0	2.5	2.5	2.5	2.0	2.0	2.0	2.0	2.0
	> 0.50–0.75	3.5	3.0	3.0	3.0	2.5	2.5	2.5	2.5	2.5
	> 0.75–1.00	4.0	3.5	3.5	3.5	3.0	3.0	3.0	3.0	3.0
	> 1.00	5.0	4.0	4.0	4.0	3.5	3.5	3.0	3.0	3.0
	> 1.50	6.0	5.0	4.0	4.0	3.5	3.5	3.0	3.0	3.0
> 5–6	> 0.00–0.25	2.0	2.0	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	> 0.25–0.30	4.0	3.0	2.5	2.5	2.0	2.0	2.0	2.0	2.0
	> 0.30–0.50	4.5	4.0	3.5	3.0	2.5	2.5	2.5	2.5	2.5
	> 0.50–0.75	5.0	4.5	4.0	3.5	3.0	3.0	3.0	3.0	3.0
	> 0.75–1.00	5.5	5.0	4.5	4.0	3.0	3.0	3.0	3.0	3.0
	> 1.00	6.0	5.0	5.0	4.5	3.5	3.5	3.5	3.5	3.5
> 6	> 0.00–0.25	4.0	3.0	2.5	2.5	2.5	2.5	2.0	2.0	2.0
	> 0.25–0.30	4.5	4.0	3.5	3.5	3.5	3.0	2.5	2.5	2.5
	> 0.30–0.50	5.0	4.5	4.0	4.0	3.5	3.0	2.5	2.5	2.5
	> 0.50–0.75	5.5	5.0	4.5	4.5	4.0	3.5	3.0	3.0	3.0
	> 0.75–1.00	6.0	5.5	5.0	5.0	4.5	4.0	3.5	3.5	3.5
	> 1.00	7.0	6.0	5.5	5.5	5.0	4.5	4.0	4.0	4.0

Multilane Highways

Table 9.27 Passenger-Car Equivalents for RVs (E_R) on Uniform Upgrades, Multilane Highways, and Basic Freeway Segments

Grade (%)	Length (mi)	E_R								
		Percentage of RVs								
		2	4	5	6	8	10	15	20	25
≤ 2	All	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
$> 2-3$	$> 0.00-0.50$	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
	> 0.50	3.0	1.5	1.5	1.5	1.5	1.5	1.2	1.2	1.2
$> 3-4$	$> 0.00-0.25$	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
	$> 0.25-0.50$	2.5	2.5	2.0	2.0	2.0	2.0	1.5	1.5	1.5
	> 0.50	3.0	2.5	2.5	2.5	2.0	2.0	2.0	1.5	1.5
$> 4-5$	$> 0.00-0.25$	2.5	2.0	2.0	2.0	1.5	1.5	1.5	1.5	1.5
	$> 0.25-0.50$	4.0	3.0	3.0	3.0	2.5	2.5	2.0	2.0	2.0
	> 0.50	4.5	3.5	3.0	3.0	3.0	2.5	2.5	2.0	2.0
> 5	$> 0.00-0.25$	4.0	3.0	2.5	2.5	2.5	2.0	2.0	2.0	1.5
	$> 0.25-0.50$	6.0	4.0	4.0	3.5	3.0	3.0	2.5	2.5	2.0
	> 0.50	6.0	4.5	4.0	4.5	3.5	3.0	3.0	2.5	2.0

Multilane Highways

Table 9.28 Passenger-Car Equivalents for Trucks (E_T) on Downgrades, Multilane Highways, and Basic Freeway Segments

<i>Downgrade (%)</i>	<i>Length (mi)</i>	E_T			
		<i>Percentage of Trucks</i>			
		<i>5</i>	<i>10</i>	<i>15</i>	<i>20</i>
< 4–6	All	1.5	1.5	1.5	1.5
4–5	≤ 4	1.5	1.5	1.5	1.5
4–5	> 4	2.0	2.0	2.0	1.5
> 5–6	≤ 4	1.5	1.5	1.5	1.5
> 5–6	> 4	5.5	4.0	4.0	3.0
> 6	≤ 4	1.5	1.5	1.5	1.5
> 6	> 4	7.5	6.0	5.5	4.5

Calculating the Average Passenger Car Speed (S), Density (D), and Level of Service (LOS) for a Multilane Highway

Step 1. Compute the Value of Free-Flow Speed. Use Eq. 9.25 to estimate FFS:

$$FFS = BFFS - f_{LW} - f_{LC} - f_M - f_A \quad (9.25)$$

where

FFS = estimated free-flow speed (mi/h)

$BFFS$ = base free-flow speed (mi/h). In the absence of field data, a default value of 60 mi/h is used for rural/suburban multilane highways

f_{LW} = adjustment for lane width (Table 9.29)

f_{LC} = adjustment for lateral clearance (Table 9.34)

f_M = adjustment for median type (Table 9.35)

f_A = adjustment for access-point density (Table 9.36)

Table 9.29 Adjustment (f_{LW}) for Lane Width

<i>Lane Width (ft)</i>	<i>Reduction in FFS, f_{LW} (mi/h)</i>
12	0.0
11	1.9
10	6.6

Table 9.34 Adjustment (f_{LC}) for Lateral Clearance

<i>Four-Lane Highways</i>		<i>Six-Lane Highways</i>	
<i>Total Lateral Clearance (ft)</i>	<i>Reduction in FFS (mi/h)</i>	<i>Total Lateral Clearance (ft)</i>	<i>Reduction in FFS (mi/h)</i>
12	0.0	12	0.0
10	0.4	10	0.4
8	0.9	8	0.9
6	1.3	6	1.3
4	1.8	4	1.7
2	3.6	2	2.8
0	5.4	0	3.9

Table 9.35 Adjustment (f_M) for Median Type

<i>Median Type</i>	<i>Reduction in FFS (mi/h)</i>
Undivided highways	1.6
Divided highways (including TWLTLs)	0.0

Table 9.36 Adjustment (f_A) for Access-Point Density

<i>Access Points/Mile</i>	<i>Reduction in FFS (mi/h)</i>
0	0.0
10	2.5
20	5.0
30	7.5
40	10.0

Example - Multi-Lane Highway

- A four-lane undivided multilane highway in a suburban area has the following characteristics: **posted speed limit = 50 mi/h**; 11-foot lanes; Lateral clearance = 10 ft; 30 access points/mi on the right side of the facility. What is the free-flow speed for the direction described?
- **Solution:**
 - Since posted speed limit is 50 mi/hr, the BFFS may be assumed to be 5 or 10 mi/hr greater
 - Assume BFFS = 55 mi/hr
 - $f_{LW} = 1.9$ mi/h (Table 9.29, 11-ft lanes)
 - $f_{LC} = 0.4$ mi/h (Table 9.34)
 - $f_M = 1.6$ mi/h (Table 9.35)
 - $f_A = 7.5$ mi/h (Table 9.36 access points/mi)
 - $FFS = 55 - 1.9 - 0.4 - 1.6 - 7.5 = 43.6$ mi/hr

Example 9.16

Determining the LOS of a Multilane Highway Segment of Uniform Grade

- A 3200 ft segment of 3.25-mi four-lane undivided multilane highway in a suburban area is at a 1.5% grade.
- The highway is in level terrain, and lane widths are 11 ft.
- **The measured free-flow** speed is 46.0 mi/h.
- The peak-hour volume is 1900 veh/h, PHF is 0.90, and there are 13% trucks and 2% RVs.
- Determine the LOS, speed, and density for upgrade and downgrade.

Solution:

- Compute v_p using Eqs. 9.4 and 9.22.

Input data:

$$V = 1900 \text{ veh/h}$$

$$PHF = 0.90$$

$$N = 2$$

$$f_p = 1.00$$

$$f_{HV} = 0.935 \text{ computed from Eq. 9.4}$$

$E_T = 1.5$, $E_R = 1.2$ (Table 9.25) since 1.5 percent grade is considered level terrain

$$P_T = 0.13, P_R = 0.02$$

$$\begin{aligned} f_{HV} &= \frac{1}{1 + P_T(E_T - 1) + P_R(E_R - 1)} \\ &= \frac{1}{1 + 0.13(1.5 - 1) + 0.02(1.2 - 1)} = 0.935 \end{aligned}$$

$$v_p = \frac{V}{(PHF)(N)(f_p)(f_{HV})}$$

$$= \frac{1900}{(0.90)(2)(1.00)(0.935)} = 1129 \text{ pc/h/ln}$$

Thus,

$$S = FFS = 46 \text{ mi/h (since } v_p < 1400)$$

- Compute density from Eq. 9.21.

$$D = \frac{v_p}{S} = \frac{1129}{46} = 24.5 \text{ pc/mi/ln}$$

LOS C (Table 9.33).

- Compute v_p using Eq. 9.21 for the upgrade direction.
Input data:

$$V = 1900$$

$$PHF = 0.9$$

$$N = 2$$

$$f_p = 1.00$$

$$f_{HV} = 0.905 \text{ computed from Eq. 9.4}$$

$$E_T = 1.5, (\text{Table 9.26}) \quad E_R = 3.0 (\text{Table 9.27})$$

$$P_T = 0.13, P_R = 0.02$$

$$\begin{aligned} f_{HV} &= \frac{1}{1 + P_T(E_T - 1) + P_R(E_R - 1)} \\ &= \frac{1}{1 + 0.13(1.5 - 1) + 0.02(3.0 - 1)} = 0.905 \end{aligned}$$

$$v_p = \frac{V}{(PHF)(N)(f_p)(f_{HV})} = \frac{1900}{(0.90)(2)(1.00)(0.905)} = 1166 \text{ pc/h/ln}$$

Thus,

$$\text{FFS} = 46 \text{ mi/h (since } v < 1400)$$

• Compute density from Eq. 9.21

$$D = \frac{v_p}{S} = \frac{1166}{46} = 25.3 \text{ pc/mi/ln}$$

LOS C (Table 9.33).

Multi-Lane Highway - Design

- Determine the number of lanes required for a divided multi-lane highway of 0.35-mi long and a 4.5% grade, if the section is to operate at LOS C. The following design features apply to this section:
 - V 3000 veh/h (weekly commuter traffic)
 - PHF 0.95
 - Trucks and Buses 10%
 - RVs 2%
 - Base Free Flow Speed (BFFS) = 50 mi/h
 - Lane width 11 ft
 - Lateral obstruction none
 - Access spacing 1 mi (no Access within the section)
 - Driver population – familiar drivers

Solution:

Step 1. Determine PCE equivalents.

$$E_T = 2.0 \text{ (Table 9.26)}$$

$$E_R = 4.0 \text{ (Table 9.27)}$$

Step 2. Compute heavy-vehicle adjustment factor

$$f_{HV} = \frac{1}{1 + P_T(E_T - 1) + P_R(E_R - 1)}$$

$$f_{HV} = \frac{1}{1 + 0.1(2 - 1) + 0.02(4 - 1)} = 0.86$$

Step 3. Convert vehicle/hour to peak 15-minute passenger-car equivalent flow rate for two, three, and four lanes.

$$\begin{aligned} v_P &= \frac{V}{PHF \times N \times f_p \times f_{HV}} \\ &= \frac{3000}{0.95 \times 2 \times 1.00 \times 0.86} \\ &= 1834 \text{ pc/h/ln} \end{aligned}$$

Step 4. Compute free-flow speed.

$$FFS = BFFS - f_{LW} - f_{LC} - f_M - f_A$$

- **BFFS = 50**
- **$f_{LW} = 1.9$**
- **$f_{LC} = 0.0$**
- **$f_M = 0.0$**
- **$f_A = 0.0$**
- **$FFS = 50 - 11.9 = 48.1$ mph**
- **Density ($D = v_p / S$) at LOS C = 26 pc/mi/ln**
- **$26 = v_p / 48.1$; $v_p = 1251$ pc/hr/ln**
- **$N = 3000 / (1251 \times 0.95 \times 1.0 \times 0.86)$**
- **$N = 2.94$ lanes; 3 lanes are required in each direction**

$$v_P = \frac{V}{PHF \times N \times f_p \times f_{HV}}$$

Chapter 6

Capacity and LOS of Multi-Lane Highways and Freeway Sections