


Applied Fluid Mechanics


1. The Nature of Fluid and the Study of Fluid Mechanics
2. Viscosity of Fluid
3. Pressure Measurement
4. Forces Due to Static Fluid
5. Buoyancy and Stability
6. Flow of Fluid and Bernoulli's Equation
7. General Energy Equation
8. Reynolds Number, Laminar Flow, Turbulent Flow and Energy Losses Due to Friction



©2005 Pearson Education South Asia Pte Ltd

Applied Fluid Mechanics


9. Velocity Profiles for Circular Sections and Flow in Noncircular Sections
10. Minor Losses
11. Series Pipeline Systems
12. Parallel Pipeline Systems
13. Pump Selection and Application
14. Open-Channel Flow
15. Flow Measurement
16. Forces Due to Fluids in Motion



©2005 Pearson Education South Asia Pte Ltd

Applied Fluid Mechanics

- 17. Drag and Lift
- 18. Fans, Blowers, Compressors and the Flow of Gases
- 19. Flow of Air in Ducts



©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

Chapter Objectives

1. Define *dynamic viscosity*.
2. Define *kinematic viscosity*.
3. Identify the units of viscosity.
4. Describe the difference between a *Newtonian fluid* and a *non-Newtonian fluid*.
5. Describe the methods of viscosity measurement using the *rotating-drum viscometer*, the *capillary-tube viscometer*, the *falling-ball viscometer*, and the *Saybolt Universal viscometer*.
6. Describe the variation of viscosity with temperature for both liquids and gases.
7. Define *viscosity index*.
8. Describe the viscosity of lubricants using the SAE viscosity grades and the ISO viscosity grades.

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

Chapter Outline

1. Dynamic Viscosity
2. Kinematic Viscosity
3. Newtonian Fluids and Non-Newtonian Fluids
4. Variation of Viscosity with Temperature
5. Viscosity Measurement
6. SAE Viscosity Grades
7. ISO Viscosity Grades
8. Hydraulic Fluids for Fluid Power Systems

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.1 Dynamic Viscosity


- As a fluid moves, a shear stress is developed in it, the magnitude of which depends on the viscosity of the fluid.
- *Shear stress*, denoted by the Greek letter (tau), τ , can be defined as the force required to slide one unit area layer of a substance over another.
- Thus, τ is a force divided by an area and can be measured in the units of N/m^2 (Pa) or lb/ft^2 .

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.1 Dynamic Viscosity

- Fig 2.1 shows the velocity gradient in a moving fluid.

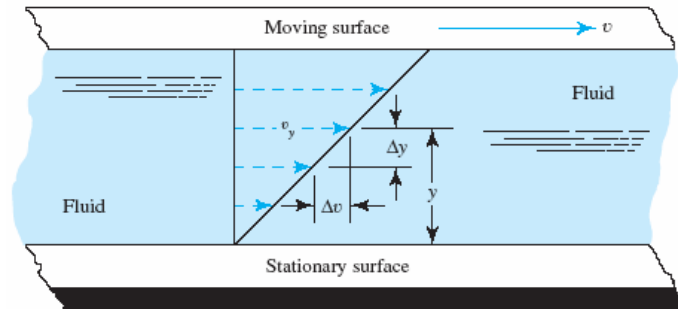

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.1 Dynamic Viscosity

- The fact that the shear stress in the fluid is directly proportional to the velocity gradient can be stated mathematically as

$$\tau = \mu(\Delta v / \Delta y) \quad (2-1)$$

where the constant of proportionality μ (the Greek letter mu) is called the *dynamic viscosity* of the fluid. The term *absolute viscosity* is sometimes used.

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.1.1 Unit of Dynamic Viscosity

- The definition of dynamic viscosity can be derived from Eq. (2-1) by solving for μ :

$$\mu = \frac{\tau}{\Delta v / \Delta y} = \tau \left(\frac{\Delta y}{\Delta v} \right) \quad (2-2)$$

- The units for η can be derived by substituting the SI units into Eq. (2-2) as follows:

$$\mu = \frac{\text{N}}{\text{m}^2} \times \frac{\text{m}}{\text{m/s}} = \frac{\text{N} \cdot \text{s}}{\text{m}^2}$$

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.1.1 Unit of Dynamic Viscosity

- Because Pa is another name for N/m^2 , we can also express μ as

$$\mu = \text{Pa} \cdot \text{s}$$

- Because $1\text{N} = 1 \text{ kg} \cdot \text{m/s}^2$ can be expressed as

$$\mu = \text{N} \times \frac{\text{s}}{\text{m}^2} = \frac{\text{kg} \cdot \text{m}}{\text{s}^2} \times \frac{\text{s}}{\text{m}^2} = \frac{\text{kg}}{\text{m} \cdot \text{s}}$$

- Thus $\text{N} \cdot \text{m/s}^2$, $\text{Pa} \cdot \text{s}$ or $\text{kg/m} \cdot \text{s}$ may be used for μ in the SI system.

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.1.1 Unit of Dynamic Viscosity

- Table 2.1 shows the system conversion.

Unit System	Dynamic Viscosity Units
International System (SI)	$\text{N}\cdot\text{s}/\text{m}^2$, $\text{Pa}\cdot\text{s}$, or $\text{kg}/(\text{m}\cdot\text{s})$
U.S. Customary System	$\text{lb}\cdot\text{s}/\text{ft}^2$ or $\text{slug}/(\text{ft}\cdot\text{s})$
CGS system (obsolete)	$\text{poise} = \text{dyne}\cdot\text{s}/\text{cm}^2 = \text{g}/(\text{cm}\cdot\text{s}) = 0.1 \text{ Pa}\cdot\text{s}$ $\text{centipoise} = \text{poise}/100 = 0.001 \text{ Pa}\cdot\text{s} = 1.0 \text{ mPa}\cdot\text{s}$

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.2 Kinematic Viscosity

- The kinematic viscosity ν (the Greek letter nu) is defined as

$$\nu = \mu/\rho \quad (2-3)$$

- Because μ and ρ are both properties of the fluid, ν is also a property.
- We can derive the SI units for kinematic viscosity by substituting the previously developed units for μ and ρ :

$$\begin{aligned}\nu &= \frac{\mu}{\rho} = \mu \left(\frac{1}{\rho} \right) \\ \nu &= \frac{\text{kg}}{\text{m}\cdot\text{s}} \times \frac{\text{m}^3}{\text{kg}} \\ \nu &= \text{m}^2/\text{s}\end{aligned}$$

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.2 Kinematic Viscosity

- Table 2.2 lists the kinematic viscosity units in the three most widely used systems.

Unit System	Kinematic Viscosity Units
International System (SI)	m^2/s
U.S. Customary System	ft^2/s
cgs system (obsolete)	$\text{stoke} = \text{cm}^2/\text{s} = 1 \times 10^{-4} \text{ m}^2/\text{s}$ $\text{centistoke} = \text{stoke}/100 = 1 \times 10^{-6} \text{ m}^2/\text{s} = 1 \text{ mm}^2/\text{s}$

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.3 Newtonian Fluids and Non-Newtonian Fluids


- The study of the deformation and flow characteristics of substances is called *rheology*, which is the field from which we learn about the viscosity of fluids.
- One important distinction is between a *Newtonian fluid* and a *non-Newtonian fluid*.
- Any fluid that behaves in accordance with Eq. (2–1) is called a *Newtonian fluid*.
- Conversely, a fluid that does not behave in accordance with Eq. (2–1) is called a *non-Newtonian fluid*.

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.3 Newtonian Fluids and Non-Newtonian Fluids

- Fig 2.2 shows the Newtonian and non-Newtonian fluids.

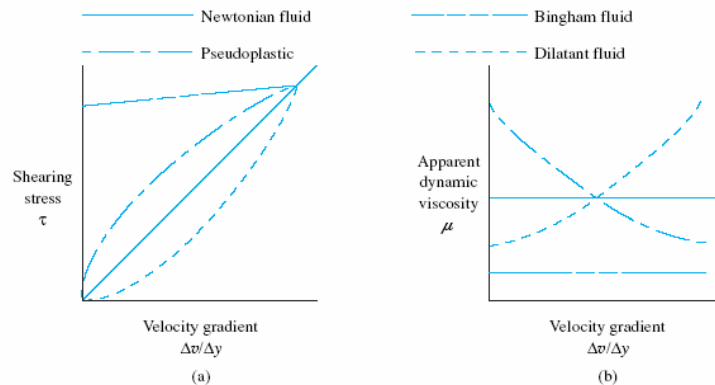

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.3 Newtonian Fluids and Non-Newtonian Fluids

- Two major classifications of non-Newtonian fluids are *time-independent* and *time-dependent* fluids.
- As their name implies, time-independent fluids have a viscosity at any given shear stress that does not vary with time.
- The viscosity of time-dependent fluids, however, changes with time.

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.3 Newtonian Fluids and Non-Newtonian Fluids

- Three types of time-independent fluids can be defined:
 1. *Pseudoplastic or Thixotropic* The plot of shear stress versus velocity gradient lies above the straight, constant sloped line for Newtonian fluids, as shown in Fig. 2.2. The curve begins steeply, indicating a high apparent viscosity. Then the slope decreases with increasing velocity gradient.

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.3 Newtonian Fluids and Non-Newtonian Fluids

2. *Dilatant Fluids* The plot of shear stress versus velocity gradient lies below the straight line for Newtonian fluids. The curve begins with a low slope, indicating a low apparent viscosity. Then, the slope increases with increasing velocity gradient.
3. *Bingham Fluids* Sometimes called *plug-flow fluids*, Bingham fluids require the development of a significant level of shear stress before flow will begin, as illustrated in Fig. 2.2. Once flow starts, there is an essentially linear slope to the curve indicating a constant apparent viscosity.

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.3.1 Viscosity of Liquid Polymers

- Five additional viscosity factors are typically measured or computed for polymers:
 1. *Relative viscosity*
 2. *Inherent viscosity*
 3. *Reduced viscosity*
 4. *Specific viscosity*
 5. *Intrinsic viscosity* (also called *limiting viscosity number*)

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.4 Variation of Viscosity with Temperature

- Table 2.3 shows the viscosity for different fluids.

Fluid	Temperature (°C)	Dynamic Viscosity (N·s/m ² or Pa·s)
Water	20	1.0×10^{-3}
Gasoline	20	3.1×10^{-4}
SAE 30 oil	20	3.5×10^{-1}
SAE 30 oil	80	1.9×10^{-2}

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.4.1 Viscosity Index

- A fluid with a high viscosity index exhibits a small change in viscosity with temperature. A fluid with a low viscosity index exhibits a large change in viscosity with temperature.
- All kinematic viscosity values are in the unit of mm²/s:

$$VI = \frac{L - U}{L - H} \times 100 \quad (2-4)$$

where U Kinematic viscosity at of the test oil


L Kinematic viscosity 40°C at of a standard oil
of 0 VI having the same viscosity at as the
test oil 100°C

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.4.1 Viscosity Index

- Fig 2.3 shows the typical viscosity index curves.

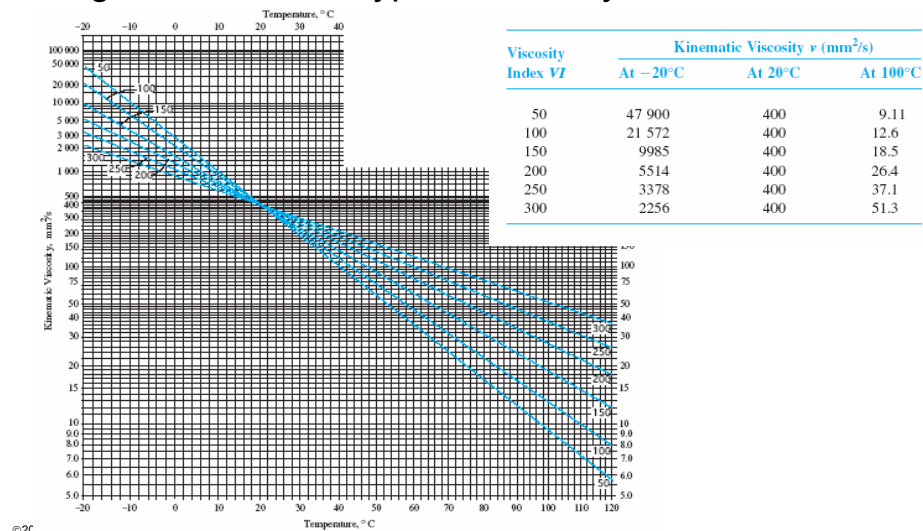

2. Viscosity of Fluids

2.5 Viscosity Measurement


- Devices for characterizing the flow behavior of liquids are called *viscometers* or *rheometers*.
- ASTM International generates standards for viscosity measurement and reporting.

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.5.1 Rotating Drum Viscometer

- Fig 2.4 shows the rotating-drum viscometer.

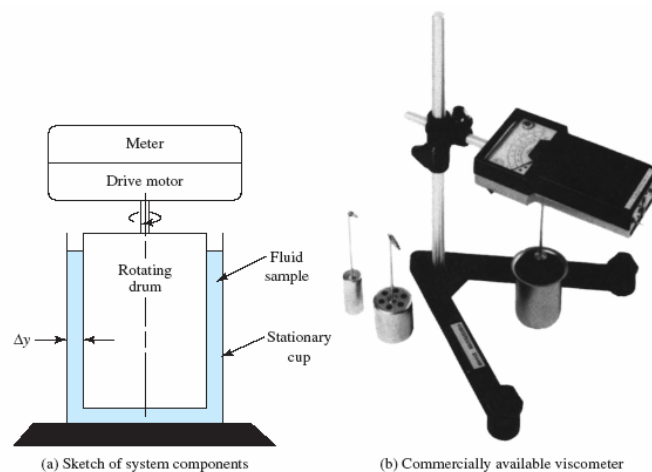

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.5.1 Rotating Drum Viscometer

- The apparatus shown in Fig. 2.4(a) measures viscosity by the definition of dynamic viscosity given in Eq. (2-2), which we can write in the form

$$\mu = \tau / (\Delta v / \Delta y)$$

- The dynamic viscosity of the fluid can be computed from the simple equation

$$\mu = \frac{K}{(n_2/n_1 - 1)}$$


- where n_2 is the speed of the outer tube and n_1 is the speed of the internal rotor. K is a calibration constant provided by the instrument manufacturer.

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.5.2 Capillary Tube Viscometer

- Fig 2.5 shows the Capillary-tube viscometer.

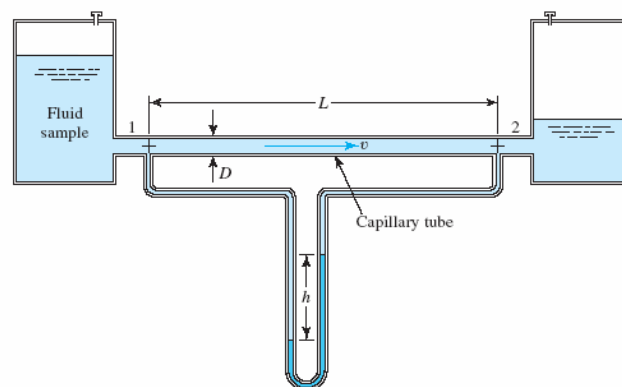

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.5.2 Capillary Tube Viscometer

- As the fluid flows through the tube with a constant velocity, some energy is lost from the system, causing a pressure drop that can be measured by using manometers.
- The magnitude of the pressure drop is related to the fluid viscosity by the following equation,

$$\mu = \frac{(p_1 - p_2)D^2}{32vL} \quad (2-5)$$

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.5.2 Capillary Tube Viscometer


- In Eq. (2–5), D is the inside diameter of the tube, v is the fluid velocity, and L is the length of the tube between points 1 and 2 where the pressure is measured.

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.5.3 Standard Calibrated Glass Capillary Viscometers

- Fig 2.6 shows the Cannon–Fenske routine viscometer.

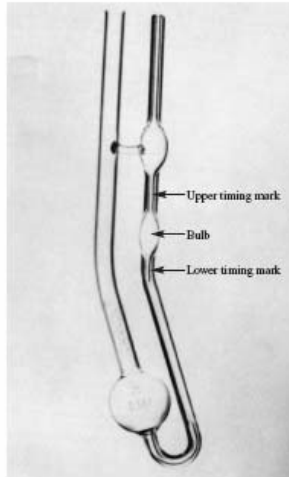


©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.5.3 Standard Calibrated Glass Capillary Viscometers

- Fig 2.7 shows the Ubbelohde viscometer.

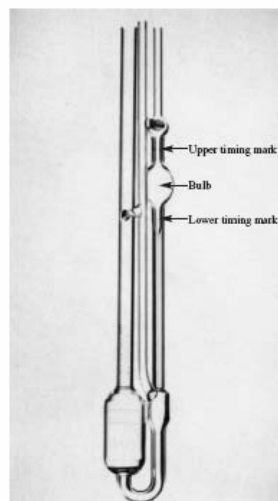

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.5.3 Standard Calibrated Glass Capillary Viscometers

- The kinematic viscosity is computed by multiplying the flow time by the calibration constant of the viscometer supplied by the vendor.
- The viscosity unit used in these tests is the centistoke (cSt), which is equivalent to mm^2/s .

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids


2.5.4 Falling-Ball Viscometer

- As a body falls in a fluid under the influence of gravity only, it will accelerate until the downward force (its weight) is just balanced by the buoyant force and the viscous drag force acting upward.
- Its velocity at that time is called the *terminal velocity*.
- Fig 2.8 shows the kinematic viscosity bath for holding standard calibrated glass capillary viscometers.
- Fig 2.9 shows the falling-ball viscometer.
- Fig 2.10 shows the free-body diagram of a ball in a falling-ball viscometer.

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids


2.5.4 Falling-Ball Viscometer

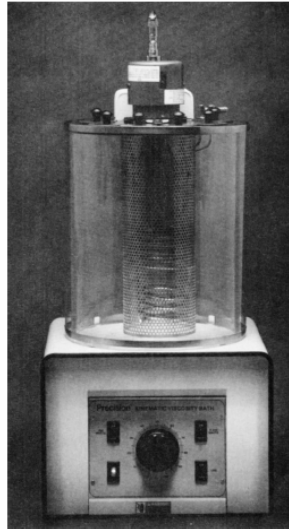

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids


2.5.4 Falling-Ball Viscometer

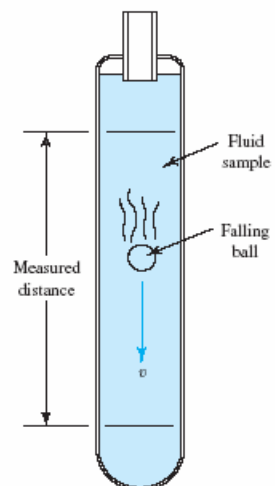

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.5.4 Falling-Ball Viscometer

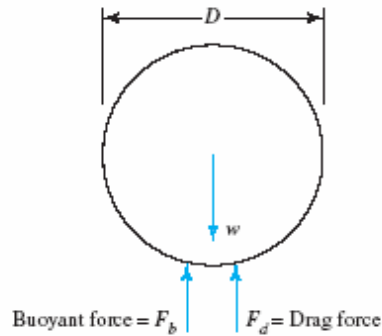

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.5.4 Falling-Ball Viscometer

- Figure 2.10 shows a free-body diagram of the ball, where w is the weight of the ball, F_b is the buoyant force, and F_d is the viscous drag force on the ball.
- Therefore, we have

$$w - F_b - F_d = 0. \quad (2-6)$$

- If γ_s is the specific weight of the sphere, γ_f is the specific weight of the fluid, V is the volume of the sphere, and D is the diameter of the sphere, we have

$$w = \gamma_s V = \gamma_s \pi D^3 / 6 \quad (2-7)$$

$$F_b = \gamma_f V = \gamma_f \pi D^3 / 6 \quad (2-8)$$

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.5.4 Falling-Ball Viscometer

- For very viscous fluids and a small velocity, the drag force on the sphere is

$$F_d = 3\pi\mu vD \quad (2-9)$$

- Equation (2-6) then becomes

$$\mu = \frac{(\gamma_s - \gamma_f)D^2}{18v} \quad (2-10)$$

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.5.5 Saybolt Universal Viscometer

- The ease with which a fluid flows through a small-diameter orifice is an indication of its viscosity.
- Fig 2.11 shows the Saybolt viscometer.
- Fig 2.12 shows the kinematic viscosity ν in SUS versus ν in mm^2/s at 37.8°C (100°F).
- The curve is straight above $\nu = 75 \text{ mm}^2/\text{s}$, following the equation

$$\text{SUS} = 4.632\nu \quad (2-11)$$


- For a fluid temperature of 100°C (210°F), the equation for the straight-line portion is

$$\text{SUS} = 4.664\nu \quad (2-12)$$

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.5.5 Saybolt Universal Viscometer

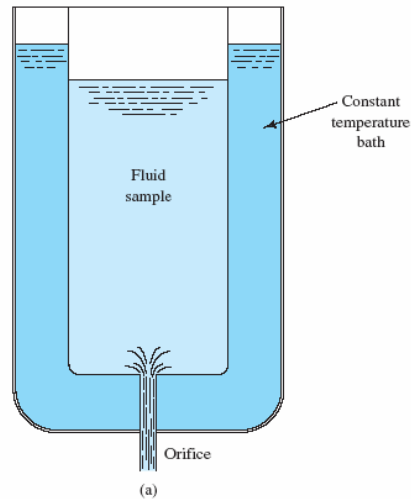


©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.5.5 Saybolt Universal Viscometer



(b) Universal Saybolt viscometer

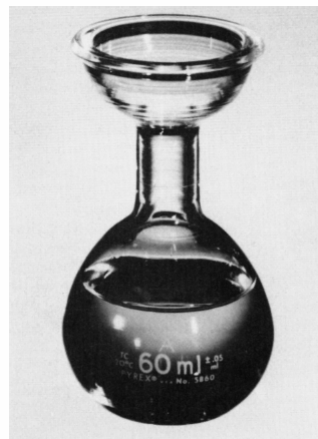


(c) 60 mL flask for collecting Saybolt sample

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.5.5 Saybolt Universal Viscometer

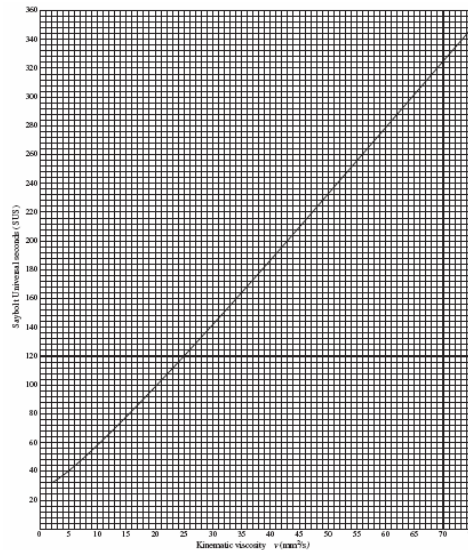

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.3 Newtonian Fluids and Non-Newtonian Fluids


2. *Dilatant Fluids* The plot of shear stress versus velocity gradient lies below the straight line for Newtonian fluids. The curve begins with a low slope, indicating a low apparent viscosity. Then, the slope increases with increasing velocity gradient.
3. *Bingham Fluids* Sometimes called *plug-flow fluids*, Bingham fluids require the development of a significant level of shear stress before flow will begin, as illustrated in Fig. 2.2. Once flow starts, there is an essentially linear slope to the curve indicating a constant apparent viscosity.

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.5.5 Saybolt Universal Viscometer

- Fig 2.13 shows the factor A versus temperature t in degrees Fahrenheit used to determine the kinematic viscosity in SUS for any temperature.

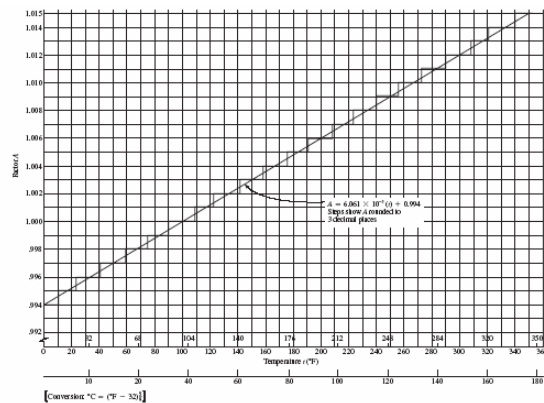

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

Example 2.2

Given that a fluid at 37.8°C has a kinematic viscosity of $220 \text{ mm}^2/\text{s}$, determine the equivalent SUS value at 37.8°C .

Because $\nu > 75 \text{ mm}^2/\text{s}$, use Eq. (2-11): $\text{SUS} = 4.632\nu = 4.632(220) = 1019 \text{ SUS}$

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

Example 2.3

Given that a fluid at 126.7°C (260°F) has a kinematic viscosity of 145 mm²/s, determine its kinematic viscosity in SUS at 126.7°C.

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

Example 2.3

Use Eq. (2-13) to compute the factor A :

$$A = 6.061 \times 10^{-5}t + 0.994 = 6.061 \times 10^{-5}(260) + 0.994 = 1.010$$

Now find the kinematic viscosity at 37.8°C (100°F) using Eq. (2-11):

$$\text{SUS} = 4.632\nu = 4.632(145) = 671.6 \text{ SUS}$$

Finally, multiply this value by A to get the SUS value at 126.7°C (260°F):

$$\text{SUS} = A(671.6) = 1.010(671.6) = 678 \text{ SUS}$$

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.6 SAE Viscosity Grade

- SAE International has developed a rating system for engine oils (Table 2.4) and automotive gear lubricants (Table 2.5) which indicates the viscosity of the oils at specified temperatures.

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.6 SAE Viscosity Grade

SAE Viscosity Grade	Low Temperature—Dynamic Viscosity		High-Temperature		High-Temperature, High-Shear-Rate Dynamic Viscosity at 150°C (cP) Min
	Cranking Condition* (cP) Max. at (°C)	Pumping Condition† (cP) Max. at (°C)	Kinematic Viscosity at 100°C (cSt)‡		
			Min.	Max.	
0W	6200 at −35	60 000 at −40	3.8	—	—
5W	6600 at −30	60 000 at −35	3.8	—	—
10W	7000 at −25	60 000 at −30	4.1	—	—
15W	7000 at −20	60 000 at −25	5.6	—	—
20W	9500 at −15	60 000 at −20	5.6	—	—
25W	13 000 at −10	60 000 at −15	9.3	—	—
20	—	—	5.6	<9.3	2.6
30	—	—	9.3	<12.5	2.9
40	—	—	12.5	<16.3	2.9 [⊥]
40	—	—	12.5	<16.3	3.7 [‡]
50	—	—	16.3	<21.9	3.7
60	—	—	21.9	<26.1	3.7

Source: Reprinted with permission from SAE J300. © 2004 by SAE International. (See Reference 14.)

Note: 1 cP = 1 mPa·s; 1 cSt = 1 mm²/s

* Using ASTM Standard D 5293

Using ASTM D 4684

+ Using ASTM D 445

◇ Using ASTM D 4683, D 4741, or D 5481

⊥ When used in these multiviscosity grades: 0W-40, 5W-40, 10W-40

‡ When used in single-grade SAE 40 and in these multiviscosity grades: 15W-40, 20W-40, 25W-40

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.6 SAE Viscosity Grade

SAE Viscosity Grade	Maximum Temperature for Dynamic Viscosity of 150 000 cP* (°C)	Kinematic Viscosity at 100°C (cSt) [#]	
		Min.	Max.
70W	-55	4.1	—
75W	-40	4.1	—
80W	-26	7.0	—
85W	-12	11.0	—
80	—	7.0	<11.0
85	—	11.0	<13.5
90	—	13.5	<24.0
140	—	24.0	<41.0
250	—	41.0	—

Source: Reprinted with permission from SAE J306. © 1998 SAE International. (See Reference 15.)

Note: 1 cP = 1 mPa·s; 1 cSt = 1 mm²/s

*Using ASTM D 2983

[#]Using ASTM D 445

©2005 Pearson Education South Asia Pte Ltd

2. Viscosity of Fluids

2.7 ISO Viscosity Grade

- The standard designation includes the prefix ISO VG followed by a number representing the nominal kinematic viscosity in cSt for a temperature of 40°C.
- Table 2.6 gives the data.

Grade ISO VG	Kinematic Viscosity at 40°C (cSt) or (mm ² /s)		
	Nominal	Minimum	Maximum
2	2.2	1.98	2.40
3	3.2	2.88	3.52
5	4.6	4.14	5.06
7	6.8	6.12	7.48
10	10	9.00	11.0
15	15	13.5	16.5
22	22	19.8	24.2
32	32	28.8	35.2
46	46	41.4	50.6
68	68	61.2	74.8
100	100	90.0	110
150	150	135	165
220	220	198	242
320	320	288	352
460	460	414	506
680	680	612	748
1000	1000	900	1100
1500	1500	1350	1650
2200	2200	1980	2420
3200	3200	2880	3520

©2005 Pearson Education South Asia Pte Ltd

Source: Reprinted with permission from ASTM Standard 2422. Copyright ASTM. (See Reference 4.)

2. Viscosity of Fluids

2.8 Hydraulic Fluid for Fluid Power System

- Fluid power systems use fluids under pressure to actuate linear or rotary devices used in construction equipment, industrial automation systems, agricultural equipment, aircraft hydraulic systems, automotive braking systems, and many others.
- There are several types of hydraulic fluids in common use, including
 1. Petroleum oils
 2. Water–glycol fluids
 3. High water-based fluids (HWBF)
 4. Silicone fluids
 5. Synthetic oils

2. Viscosity of Fluids

2.8 Hydraulic Fluid for Fluid Power System

- The primary characteristics of such fluids for operation in fluid power systems are
 1. Adequate viscosity for the purpose
 2. High lubricating capability, sometimes called lubricity
 3. Cleanliness
 4. Chemical stability at operating temperatures
 5. Noncorrosiveness with the materials used in fluid power systems
 6. Inability to support bacteria growth
 7. Ecologically acceptable
 8. High bulk modulus (low compressibility)

©2005 Pearson Education South Asia Pte Ltd